


DOUBLE CHECK VALVES

Value Plastics' unique DCV Series bi-directional double check valve is designed to transfer clean fluid from a supply vessel to a use site.

The fluid supply vessel is connected to the valve supply port (chimney) using a luer connection or tubing. The fluid is withdrawn from the supply vessel by a syringe or other device connected to the aspiration port. When the syringe is compressed the fluid is then transferred, through the exit port, to the use site without adulterating the fluid.

The system provides high flow. Two inlet cracking pressure ranges, two supply port options and two exit port options are available. All luer tapers comply with the requirements of ISO Standard 594-1. DCV Series double check valves are manufactured entirely from materials that are compatible with ethylene oxide, gamma and e-beam sterilization procedures.

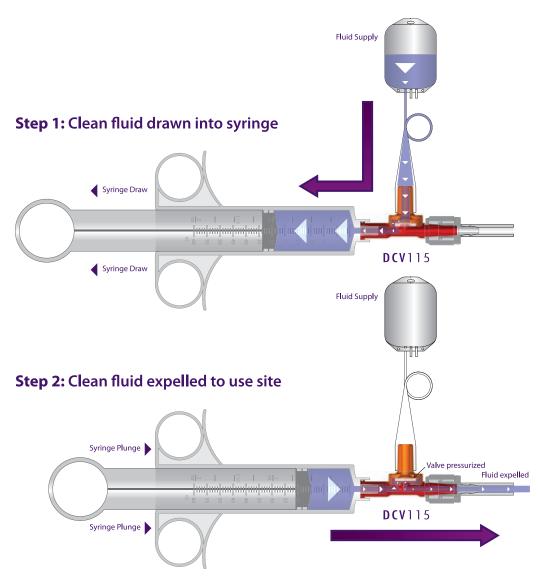

Website: www.chromtech.net.au E-mail: info@chromtech.net.au TelNo: 03 9762 2034... in AUSTRALIA