

# MULTIDETEK

## New trace gas analyzer for multiple impurities

With its plug and play philosophy, this compact system provides an attractive and cost effective solution for the industrial market. Based on the Plasma Emission Detector technology, this stand-alone Gas Chromatograph is a flexible and customized platform providing analysis from ppb to %.



### > FEATURES:

- Multi trace impurities in one chassis
- Based on the PlasmaDetek technology
- Compact rackmount 4U
- ppb to % application
- User friendly
- Touch screen interface
- Large scale measurement
- High performance Diaphragm valves

### > APPLICATIONS:

- Air Separation Unit
- Crude Argon production for nitrogen monitoring
- Speciality gas laboratories
- Process control
- Gas purification
- Steel industries
- Chemical plant
- Welding gas control
- Helium liquification plants
- Quality control for truck filling station
- Semiconductor manufacturing




+



=

### HIGH PURITY ARGON ANALYSIS



#### Chromatogram

- Carrier gas : Argon
- Configuration : one injection valve
- Detector : PlasmaDetek

The combination of the PlasmaDetek and the high performance diaphragm valve bring outstanding measurement performance. A longer useful time and better performance on common GC techniques are achieved. They also allow new methods that are not possible with other commercial detectors and valves.

The possibility of the PlasmaDetek to work with argon or helium carrier from ppb to % measurements give a big advantage to this analyzer over the existing systems.

## > CAPABILITIES:

(MOST POPULAR APPLICATIONS)

	H2	Ar	O2	N2	He	CO2	NH3
H2	-	•	•	•	•	•	•
Ar	•	-	•	•	•	•	•
O2	•	•	-	•	•	•	•
N2	•	•	•	-	•	•	•
CH4	•	•	•	•	•	•	•
CO	•	•	•	•	•	•	•
CO2	•	•	•	•	•	-	•
NMHC	•	•	•	•	•	•	-
N2O	•	•	•	•	•	-	•
C2H2	•	•	•	•	•	-	-
C2H4	•	•	•	•	•	-	-
C2H6	•	•	•	•	•	-	-
C3H8	•	•	•	•	•	-	-
Ne	•	-	•	•	•	•	•




Samples  
Impurities

\*some application requires more than one chassis/Multidetek  
Other measurement possible, please consult factory

## > SPECIFICATIONS:

DETECTOR TYPE	Plasma Emission Detector design (PlasmaDetek)
CARRIER	Argon and Helium
RANGE	Application dependant
REPEATABILITY	< 1% full scale
ACCURACY	Better than $\pm 1\%$ full scale
STANDARD FEATURES	<ul style="list-style-type: none"> <li>Manual or autoranging (user selectable)</li> <li>Microprocessor controlled</li> <li>5.6" TFT intelligent LCD module with Touch Screen</li> <li>Self diagnosis system with auto-resolve alarm</li> <li>4-20 mA isolated output</li> <li>Alarm Historic</li> <li>Digital system status output for remote monitoring (dry relay contact)</li> </ul>
OPTIONS	Serial port: RS-232 / 422 / 485 / Profibus for monitoring
GAS CONNECTIONS	Sample: 1/8" compression fittings or 1/8 VCR - Vent: 1/8" compression fitting
CALIBRATION GAS	Zero: LDP1000 purified gas (Getter) - Span: 70% to 90% of the scale
SAMPLE PRESSURE REQUIREMENTS	10 to 30 PSIG
CARRIER PRESSURE REQUIREMENTS	100 PSIG
OPERATING TEMPERATURE	10 °C to 45 °C
SUPPLY	115 VAC, 50 - 60 Hz or 220 VAC, 50 - 60 Hz
POWER CONSUMPTION	200 Watts (application dependant)
DRIFT	< $\pm 1\%$ over 24 hours

## > DIMENSIONS:

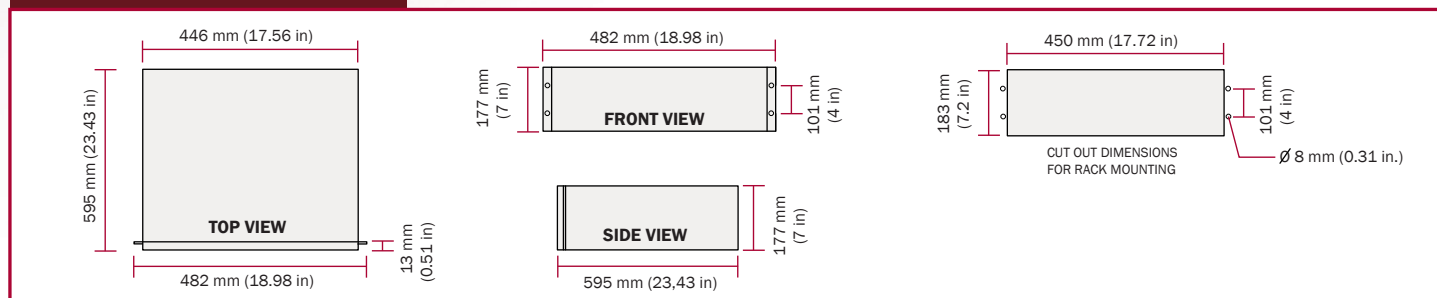

Australian Distributors  
Importers & Manufacturers  
www.chromtech.net.au

Website NEW : [www.chromalytic.com.au](http://www.chromalytic.com.au) E-mail : [info@chromtech.net.au](mailto:info@chromtech.net.au) Tel: 03 9762 2034 . . . in AUSTRALIA

© 2011 LDetek inc.